





PCB Connector — TLP series ( Pin header )— TLPHC-006R




**图例(Pic. shown) : TLPHC-006R-06P-G12**

General: PCB Connector Rated : 160V,5A  
Single row, 2.50mm pitch, 02-24 Pole  
Orientation: 180°(plug-in to board)

认证 ( Approval ) :

技术参数 Technical Data	UL standard			IEC standard		
	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
UL应用组别(UL Application group)	UL Application group			III / 3		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)	150V	--	150V	--	160V	--
额定电流(Rated current)	5A	--	5A	--	5A	--
额定连接容量(Rated connection capacity)	--			--		
绝缘材料(Insulation Material)	--			PA66 UL94 V-0		
电流承载部件材料和镀层( Material & Plating of Current carrier )	--			Copper alloy , Tin plated		
接线弹片材料(Material of Clamp spring )	--			--		
绝缘电阻(Insulation Resistance)	--			500MΩ or more at DC500V		
耐电压(1分钟)(Withstanding Voltage/1Min)	--			1300V		
额定冲击电压(Rated surge voltage)	--			--		
接线螺丝(Wire clamp unit Screw), 最大扭矩( torque Max. )	--			--		
固定螺母(Mounting Nut), 扭矩(torque)	--			--		
剥线长度(Wire stripping length)	--			--		
使用温度(Operating temperature)	--			-40°C up to +115°C		
焊接方式(Soldering recommend)	Wave soldering ,260°C 5S Max (Single Wave) , 260°C 10S Max(Double Wave)					

**订购方式(How to order)**

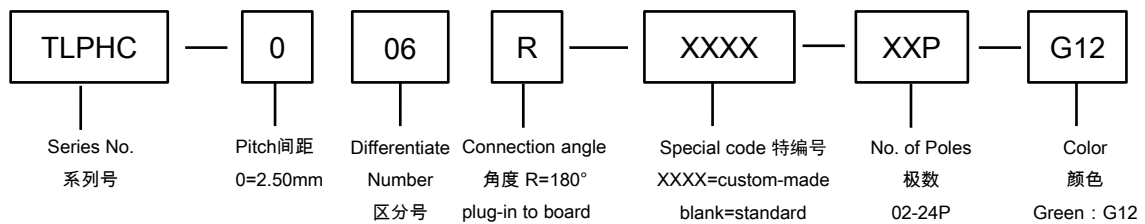

Web:www.china-tianli.com TEL:+86-574-6347-9600,6389-6436 Mail : sale@china-tianli.cn  
地址:中国浙江省宁波杭州湾新区庵东工业园区纬三路138号  
ADD : 138 , Weisan Rd.,Andong Development Zone, Hangzhou Bay Area, Ningbo, Zhejiang, China

■ 插头 ( Female Connector ) — single row



P/N : TLPS-006V  
Wiring orientation :  
180°(wire to plug-in )  
Rated : 160V,5A , 0.5mm<sup>2</sup>  
Screw clamp unit