



PCB terminal block — BARRIER SERIES— T110-02

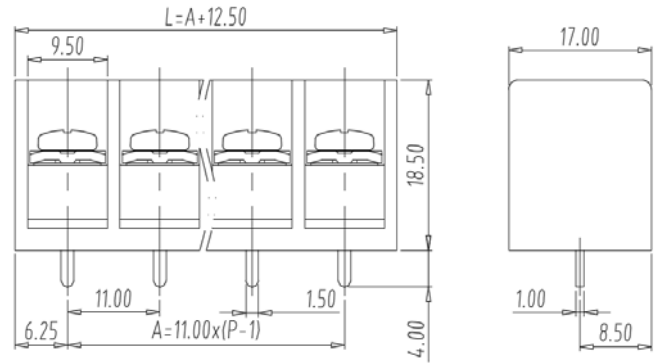

■ 图示(Pic. shown) : T110-02-06P-KC

General. PCB terminal block Rated : 630V, 32A , 4mm²
Single row , 11.0mm pitch , 02-20 Pole
Wiring Connection : 180°(wire to board)
Screw clamp unit: M3.5 , 0.8~1.0(Max1.2N·m)

认证 (Approval) :

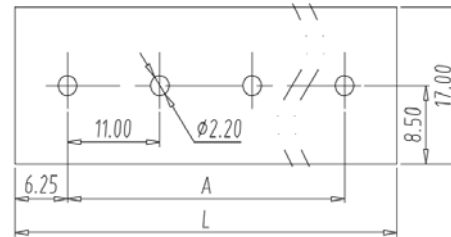

技术参数Technical Data	UL standard			IEC standard		
UL应用组别(UL Application group)	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)	300V	300V	600V	500V	630V	800V
额定电流(Rated current)	30A	30A	5A	32A	32A	32A
额定连接容量(Rated connection capacity)	22AWG ~ 10AWG			0.5mm ² ~0.4mm ²		
刚性导线横截面 (AWG) (Conductor cross section,solid)				22~10		
柔性导线横截面 (AWG) (Conductor cross section,stranded)				22~10		
刚性导线横截面 (mm2) (Conductor cross section,rigid)				0.5~0.4		
柔性导线横截面 (mm2) (Conductor cross section,flexible)				0.5~0.4		
绝缘材料(Insulation Material)				PBT UL94V-0		
绝缘材料组别(Material group)				IIIa		
电流承载部件材料和镀层(Material & Plating of Current carrier)				Copper alloy , Tin plated		
接线弹片材料(Material of Clamp spring)				--		
耐电压(1分钟)(Withstanding Voltage/1Min)				2200V		
额定冲击电压(Rated surge voltage)				6000V		
接线螺丝(Wire clamp unit Screw) , 最大扭矩(torque Max.)				M3.5, 1.2N·m		
固定螺丝(Mounting Screw) , 扭矩(torque)				--		
剥线长度(Wire stripping length)				9~10mm		
使用温度(Operating temperature)				-40°C up to +120°C		
存储温度(Storage temperature)				-40°C up to +70°C		
存储相对湿度(Storage relative humidity)				≤70%		
焊接方式(Soldering recommend)				Wave soldering ,260°C 8S Max		

■ 订购方式(How to order)

T	110	—	02	—	XXXX	—	XXP	—	X	—	C
Series No. 系列号	Pitch间距 P=11.0mm		Solder Pin Spec. 焊针规格		Special code 特编号 XXXX=custom-made blank=standard		No. of Poles 极数 02-20P		Color 颜色 Black: K		Screw Spec. 螺丝规格 C=Cross Type